



hydr'eau pave

Distinctively textured with the look of natural stone, these permeable paving stones are designed to reduce excessive rainfall runoff. Hydr'eau Pave allows for optimum water flow – through joints and into the base, sub-base and sub-soil – reducing erosion and preventing sediment build-up. With an 80mm (3.15") thickness, they are ideal for pedestrian and moderate vehicle traffic. Combine with other Oaks products of the same thickness to create unique designs.



Paver: Hydr'eau Pave, Silversand



Vehicular Traffic



Permeable

hydr'eau pave

SIZES



4x4 Stone
Width 100mm (3.94")
Length 100mm (3.94")



4x8 Stone
Width 100mm (3.94")
Length 200mm (7.87")




8x8 Stone
Width 200mm (7.87")
Length 200mm (7.87")



8x12 Stone
Width 200mm (7.87")
Length 300mm (11.81")

Combo Bundle

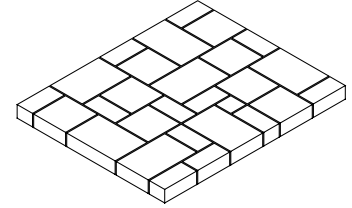

Combo Bundle Layout by Layer

COLORS



MACKINAW



SILVERSAND



ONYX
Ideal for sailor or soldier coursing.



SILVERSAND WITH ONYX
SAILOR COURSING

Note: Sailor coursing shown uses 4x8, 8x8 and 8x12 in a running bond (Sailor course).

SPECIFICATIONS

Bundle Specifications						Per Section Specifications				
HYDR'EAU PAVE	Layers	Sq. Ft.	Lin. Ft.	Pieces	Weight	Sections	Sq. Ft.	Lin. Ft.	Pieces	Weight
4x4	Combo	64.1	97.4 (sailor)	6	2232	Layer	10.68	16.2 (sailor)	1	372
4x8				72					12	
8x8				48					8	
8x12				42					7	

All Oaks Landscape products fully meet or exceed the latest version of CSA A231, ASTM C936, ASTM C1372 or ASTM C1782 as applicable to the specific product and area of sale.

To find a dealer nearest you please visit:

OAKSpavers.com

Or, call us toll free at:

1.800.709.OAKS (6257) (Canada)

1.800.876.OAKS (6257) (USA)

Members of:



Product representations shown in this publication are intended to convey the general color, texture and appearance of the product. Variations may occur in the manufacturing and printing process. Always select from an actual product sample.